


## 64Ch Standard BrainCap with Multitrodes

### Electrode Layout and Channel Assignment

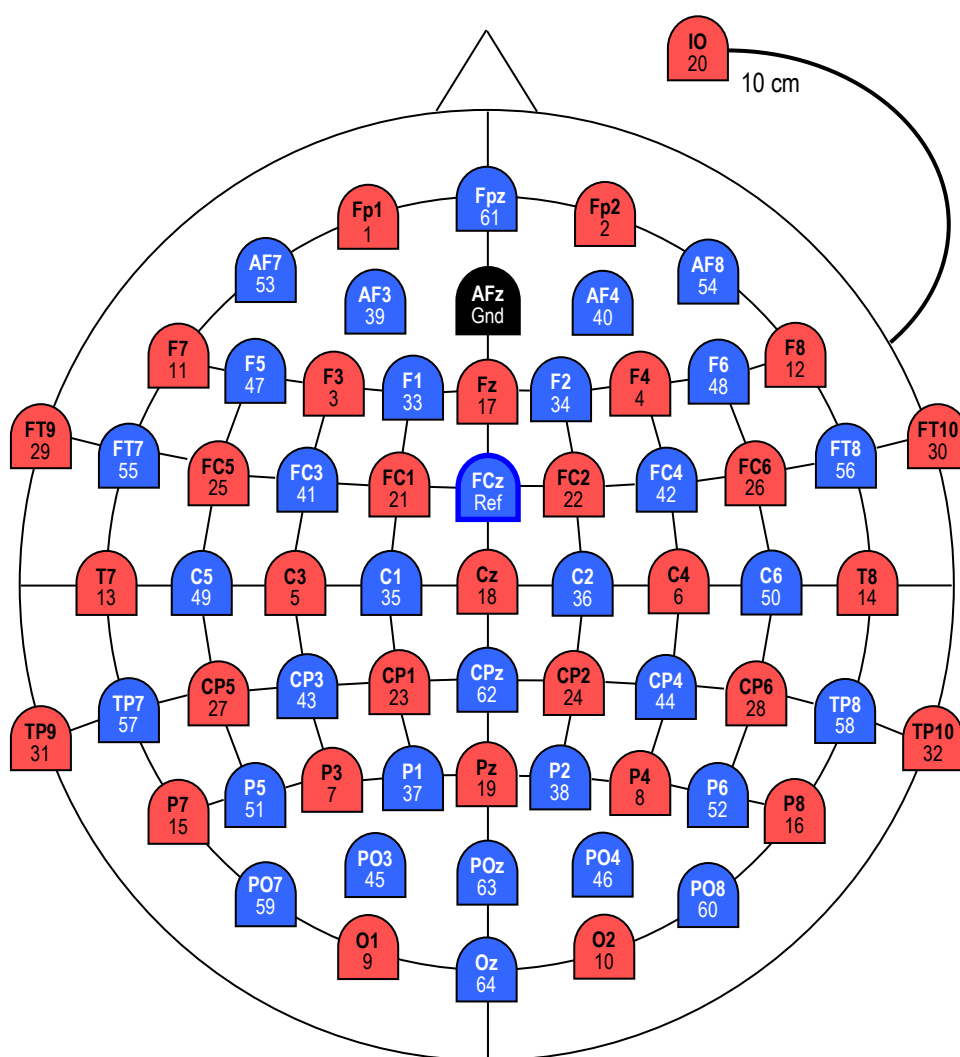

## Details

### Ordering Information

For ordering please give **Article Number, Cap Cut, and Size** (e.g. *BC-64, C-Cut, 56*):

- Article Number: **BC-64**
- Cap Cut: **C-Cut** or **A-Cut**
- Size (given in cm head circumference):
  - Adult caps: **54, 56, 58, 60, 62, 64** (average male: 58, average female: 56)
  - Children caps: **50** (3-4 years), **52** (5-10 years), **54** (11-14 years)
  - Infant caps: **42, 44** (7 month), **46, 48** (3 years)

The catalogue-number comprises the cap as described. For further information about accessories or consumables, please visit our website or contact our local distributor.

### Cap

Standard: Subtemporal Cap with integrated chin belt, white.

Sizes 52 – 64 made from High Precision Fabric, Sizes 50 and smaller made from High Comfort Fabric

*Options: C-Cut or A-Cut, Size. For further variations, contact us.*

### Electrodes

All electrodes are Multitrodes with sintered Ag/AgCl sensors. They are buttoned directly into the cap (total height 3,5 mm) or can be attached to the skin with washers (= double-sided adhesive rings).

All electrodes are number-labelled at the sensor end.

The cable colours correspond to the above figure.

The cables are attached to the cap with nylon threads. Two cable trees leave the cap plait-like behind the ears, pointing downwards. 20 cm before the connector boxes there is a crossing point. Lengths of cable trees are approx. 120 cm.

### Termination

Each cable tree is led into a Connector box. From here the caps are connected to BrainAmp with 30 cm-flat-ribbon-cables. These flat ribbon cables come with the BrainAmps. They can be re-ordered from BrainProducts (Cat-No. BP-02400-NN) or from Easycap (Cat.-No. E80).

### Theta/Phi-Coordinates

Please find a table with Theta/Phi-Coordinates of all electrode sites at the end of this file.

Table of Coordinates for BC-64

Channel-number	Name	Theta	Phi
1	Fp1	-90	-72
2	Fp2	90	72
3	F3	-60	-51
4	F4	60	51
5	C3	-45	0
6	C4	45	0
7	P3	-60	51
8	P4	60	-51
9	O1	-90	72
10	O2	90	-72
11	F7	-90	-36
12	F8	90	36
13	T7	-90	0
14	T8	90	0
15	P7	-90	36
16	P8	90	-36
17	Fz	45	90
18	Cz	0	0
19	Pz	45	-90
20	IO	--	--
21	FC1	-31	-46
22	FC2	31	46
23	CP1	-31	46
24	CP2	31	-46
25	FC5	-69	-21
26	FC6	69	21
27	CP5	-69	21
28	CP6	69	-21
29	FT9	-113	-18
30	FT10	113	18
31	TP9	-113	18
32	TP10	113	-18
33	F1	-49	-68
34	F2	49	68
35	C1	-23	0
36	C2	23	0
37	P1	-49	68
38	P2	49	-68
39	AF3	-74	-68
40	AF4	74	68
41	FC3	-49	-29
42	FC4	49	29
43	CP3	-49	29
44	CP4	49	-29
45	PO3	-74	68
46	PO4	74	-68
47	F5	-74	-41
48	F6	74	41
49	C5	-68	0

Channel-number	Name	Theta	Phi
50	C6	68	0
51	P5	-74	41
52	P6	74	-41
53	AF7	-90	-54
54	AF8	90	54
55	FT7	-90	-18
56	FT8	90	18
57	TP7	-90	18
58	TP8	90	-18
59	PO7	-90	54
60	PO8	90	-54
61	Fpz	90	90
62	CPz	22	-90
63	POz	67	-90
64	Oz	90	-90
Gnd	Afz	67	90
Ref	FCz	23	90

These values are standardized to a Theta of 90° for the plane through Fpz, T7, T8, Oz.

The signs follow this convention:

