


32Ch Standard BrainCap for TMS - for actiCHamp Plus With EIB64-DUO

Electrode Layout and Channel Assignment

Red: Channels 1-30

White: Additional slits

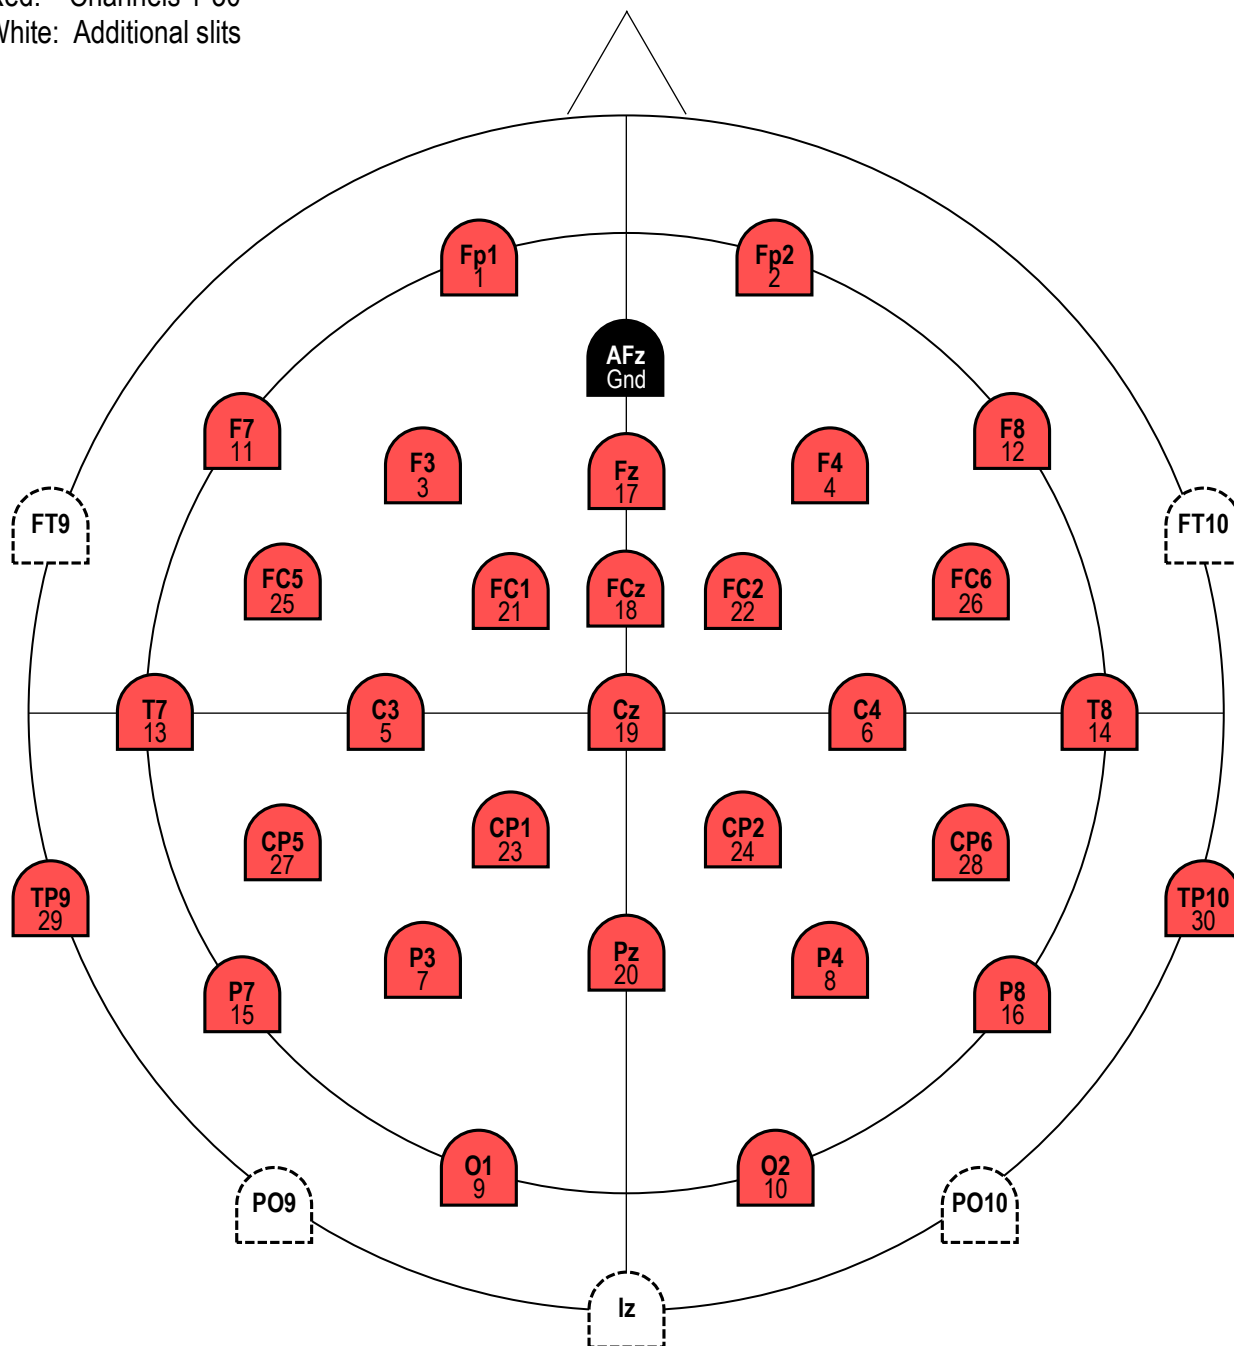

Details

Ordering Information

For ordering please give **Article Number, Cap Cut, and Size**
(e.g. *BCA-TMS-32, C-Cut, 56*):

- Article Number: **BCA-TMS-32**
- Cap Cut: **C-Cut** or **A-Cut**
- Size (given in cm head circumference):
 - Adult caps: **54, 56, 58, 60, 62, 64** (average male: 58, average female: 56)
 - Children caps: **50** (3-4 years), **52** (5-10 years), **54** (11-14 years)
 - Infant caps: **42, 44** (7 month), **46, 48** (2 years)

The catalogue-number comprises the cap with 30+1 built-in but removable electrodes, 2 additional electrodes, 64Ch-electrode input box EIB64-DUO. For connecting to the actiCHamp, please order one connecting cable set "AP-CONNECT-SET-DUO", best per amplifier. For further information on accessories or consumables, please visit our website or contact our local distributor.

Cap

Standard: Sub-Inion Cap with integrated chin belt, white

Sizes 52 – 64 made from High Precision Fabric, Sizes 50 and smaller made from High Comfort Fabric

Options: C-Cut or A-Cut, Size. For further options, contact us.

Electrodes

All electrodes are Multitrodes for TMS with sintered Ag/AgCl sensors (total height approx. 3 mm). They are buttoned directly into the cap or can be attached to the skin with washers (= double-sided adhesive rings).

All electrodes are:

- Name-labelled near sensor according to the figure (spare electrodes labelled as 31, 32).
- Number-labelled near connector according to the figure (spare electrodes labelled as 31, 32).
- The electrode wires are very loosely attached to cap with velcro straps that can be re-opened.
- The cables leave the cap plait-like behind the ears. The two cable trees are held together with only a few velcro straps that can be re-opened. Length of cable trees (from the rim of the cap to the connectors) is approx. 120 cm.
- Plugged into Electrode Input Box EIB64-DUO.
- Electrode FCz(18) may serve as online reference channel.

Hints

Unused electrodes can be buttoned out of the cap, and their connections can be removed from the EIB.

To minimize the TMS artefacts in the EEG signal, electrode cables should be led away from the TMS stimulation point. To achieve that, the electrodes can be rotated in their cap holes. Alternatively, the Velcro straps can be opened and cables – or bunches of cables – can be removed to another position on the cap.

Depending on the site of the TMS stimulation point it may be advisable to move the Ref-electrodes in its entirety to another position further away from the stimulation point.

Table of Coordinates of BCA-TMS-32

Channel-number	Name	Theta	Phi
1	Fp1	-90	-72
2	Fp2	90	72
3	F3	-60	-51
4	F4	60	51
5	C3	-45	0
6	C4	45	0
7	P3	-60	51
8	P4	60	-51
9	O1	-90	72
10	O2	90	-72
11	F7	-90	-36
12	F8	90	36
13	T7	-90	0
14	T8	90	0
15	P7	-90	36
16	P8	90	-36
17	Fz	45	90
18	FCz	23	90
19	Cz	0	0
20	Pz	45	-90
21	FC1	-31	-46
22	FC2	31	46
23	CP1	-31	46
24	CP2	31	-46
25	FC5	-69	-21
26	FC6	69	21
27	CP5	-69	21
28	CP6	69	-21
29	TP9	-113	18
30	TP10	113	-18
31	31	NN	NN
32	32	NN	NN
	FT9	-113	-18
	FT10	113	18
	PO9	-113	54
	PO10	113	-54
	Iz	112	-90
GND	AFz	67	90

These values are standardized to a Theta of 90° for the plane through Fpz, T7, T8, Oz.

The signs follow this convention:

